

Pressure Transmitter



Warning: Before installation, commissioning, and operation, ensure that the pressure transmitter is suitable for the application in terms of measuring range, design and environmental conditions. Non-observance can result in serious injury and/or damage to equipment.

Intended use: This instrument converts pressure into an electrical signal.
The instrument has been designed and built solely for the intended use described here and may only be used accordingly. If the equipment is used in a different manner, the protection provided by the equipment may be impaired and Trafag shall not be liable for any claims at all.


Datasheet

NPN 8264



www.trafag.com/H72313

Type label description (example)

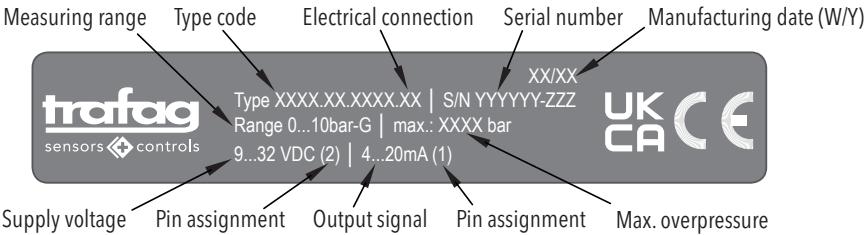

Electrical connections

Designation	EN175301-803-A (DIN 43650-A)	Cable (FTR) 4 x 0.5 mm ² (ETFE) 3 x 0.75 mm ²
Type code	8264.XX.XXXX04	8264.XX.XXXX78/89
Pin configuration		


Output
4 ... 20 mA

Load resistance
(U_{SUPPLY} -9V)/ 20mA


U_{SUPPLY}
9 ... 32 VDC

Connection of the measuring equipment

Current output 2-wires



Pressure connection mounting




- 1) Torque: G 1/4": M = 32 ... 40 Nm
G 1/8": M = 16 ... 20 Nm
M10x1.0: M = 16 ... 20 Nm


2) O-Ring: \varnothing 6.75x1.78 NBR 90 Sh

3) Fixing screw: M5; property class: 8.8; torque: 4.5...6 Nm


Mounting of elbow connector (accessory 55)



- 1) Insert cable
2) Connect wires and adjust orientation



Recommended accessory Diagnostic valve block



Datasheet



www.trafag.com/H72361